

## High Pressure Universal Design Non Return Valve (In-Line NRV)


FlowBiz manufactures supplies and exports globally accepted designed & the most suitable Universal Design Non-Return Valve. Our speciality is durability, creative innovation, erosion resistance and strength. FlowBiz's perfectly engineered design can be mounted in any position in pipeline maintenance free.

Size Range:  $\frac{1}{2}$  inch to 2 inch (15mm to 50mm)

End Connection: Screwed (Female BSP/NPT)

Non Return Valve	Technical Specification:		
Pressure	3000 PSI		
Temperature	100°C		
Media	Air, Water, Oil & Gas		
Ends	Screwed (F) to BSP (NPT On Request)		
Leakage	Bubble Tight		



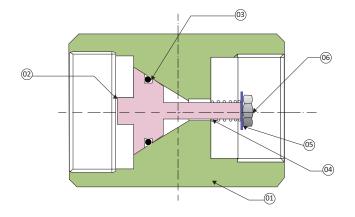

No.	Description	Material	Qty.
1	Body	CF8 / CF8M	01
2	Valve Pin	S.S. 304 / S.S. 316	01
3	'O' Ring	Viton	01
4	Spring	S.S. 304 / S.S. 316	01
5	Washer	S.S. 304 / S.S. 316	01
6	Nut	S.S. 304 / S.S. 316	01

Dimensio	(All Dimensions are in mm)					
Valve Model	Valve Size					Weight
	MM	Inch	L	A/F	A/C	(Approx) Kgs.
NRV - 15	15	1/2"	60	27	30	0.200
NRV - 20	20	3/4"	65	35	38	0.370
NRV- 25	25	1"	70	41	45	0.520
NRV - 32	32	1 1/4"	73	48	51	0.630
NRV - 40	40	1 1/2"	86	58.5	65	1.250
NRV - 50	50	2"	94	68	72	1.610

